



SN-NVR3516E2-P16

16CH 2HDD NVR with 16CH PoE



Key Features

- Up to 16ch IP cameras access
- Up to 8MP resolution recording
- 2 SATA hard disk up to 8TB
- 1 RJ45 10M/100M/1000M network interface
- 16ch POE ports
- Simultaneous HDMI&VGA up to 4K output
- Smart search & playback
- Support cloud upgrade
- Remote Playback & Live view via Network



Specification

Video Input	
IP Camera Input	16 Channel
Incoming Bandwidth	160Mbps
Outgoing Bandwidth	1600Mbps
Video Output	
HDMI Output	3840×2160, 1920×1080, 1440×900, 1280×1024
VGA Output	1920×1080, 1440×900, 1280×1024
Decoding Capacity	1ch 8MP, 4ch 1080P, 8ch D1, 16ch D1 @30fps
Dual Stream	Support
Multi-screen Display	1/4/9/16
Recording	
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Encode	H.264, H.265, MJPEG
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
Playback and Backup	
Sync Playback	16/9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network
Network	
Interface	1 RJ-45 port (10/100/1000Mbps)
PoE	16 Ports (IEEE 802.3af), 128W
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP
Remote Users	8 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF, SDK, CGI

Storage	
HDD	2 SATA Ports, up to 8TB for each HDD
eSATA	N/A
Cloud Storage	Support
Interface	
Audio I/O	1/1
Alarm Input	8ch
Alarm Output	2ch
USB	3 ports (USB 2.0 × 3)
General	
Power Supply	AC100 ~ 240V
Power Consumption	< 5W (without HDD)
Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC ISO 9001:2015 (Quality Management System) ISO 14001:2015 (Environmental Management System)
Dimensions	372×310.5×46.5mm
Net Weight	2.75kg (without HDD)



Dimensions(mm)

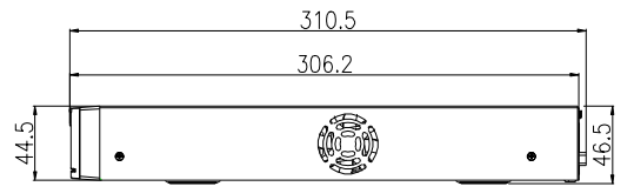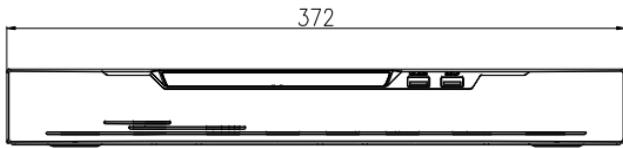

Rear Panel

