



SN-XVR3808E2

5MP 8CH 2HDD Hybrid DVR





Key Features

- Supports AHD, TVI, CVI, CVBS, IP video inputs
- Up to 4K-N/5MP resolution for recording
- Max 12-ch IP camera inputs, each channel up to 1080P
- Support HDMI/VGA video output
- Smart search and playback
- Supports multiple languages
- Easy to use same Interface of GUI/WEB

Specification

Video and Audio	
Analog Video Input	8ch BNC
AHD Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P
TVI Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P
CVI Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P
CVBS Input	PAL/NTSC
IP Video Input	8+4ch, each channel up to 1080P
Audio In/Out	4/1
Two-way Talk	N/A
HDMI Output	3840×2160, 1920×1080, 1280×1024, 1024×768
VGA Output	1920×1080, 1280×1024, 1024×768
CVBS Output	PAL/NTSC
Synchronous Playback	9/4/1
Recording	
Encoding Resolution	4K-N, 5MP, 4MP, 1080P, 720P, D1 etc.
Frame Rate	4K-N@8fps, 5MP@7fps, 4MP@8fps, 1080P@15fps, 720P@30fps
Video Bit Rate	Main stream: 16Kbps~4096Kbps, Sub stream: 16Kbps~1024Kbps
Dual Stream	Support
Network	
Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
Protocols	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP
Remote Users	4
Hard Disk	
SATA	2 SATA interfaces
Capacity	Up to 8TB capacity for each disk
Interface	
Alarm In/Out	8/1
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 2 × USB 2.0
RS485	Support
General	
Power Supply	DC12V/3A
Power Consumption	Max 15W (without HDD)
Working Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Working Humidity	Less than 90% RH
Dimensions (W×D×H)	350 x 305 x 49 mm (13.78 × 12.01 × 1.93 inch)
Net Weight	1.8 kg (3.97 lb)

Dimensions (mm)

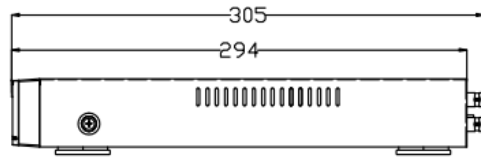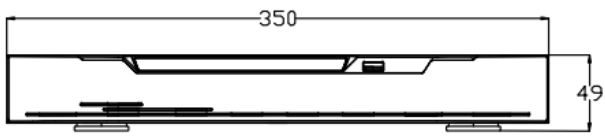

Rear Panel